



ADTRAN

1148VX

48-port Sealed, Vectored FTTN



VDSL2



Low TCO



Sealed



Vectoring

Benefits

- Environmentally sealed, temperature hardened standalone VDSL2 FTTN solution enables rapid deployment of ultra-broadband services
- Delivers 100 Mbps over 3000ft from the node using bonded, vectored VDSL2
- Provides silent operation and low profile construction abiding to strict residential zoning rules
- Supports IPTV video service
- Can be mounted on a pole, pedestal, cross-box or remote terminal delivering ultra-low Total Cost of Ownership (TCO)
- Allows system scalability from 48 to 384 subscribers, with field-upgradeable 384-port system-level vectoring (SLV)
- Reduces installation cost via flexible powering options (span, AC and DC powering)

Overview

Accelerating Gigabit Services

Premium broadband services are fueling the need for pushing fiber deeper into the network and closer to the end user. However, the cost of delivering Fiber-to-the-Home (FTTH) can be both cost-prohibitive as well as time consuming, particularly in remote and rural locations. Next-generation broadband technologies such as Bonded and Vectored VDSL2 allow service providers to utilize existing copper infrastructure in combination with sealed Fiber-to-the-Node (FTTN) solutions to cost-effectively deliver ultra-broadband (100+ Mbps) and IPTV services to subscribers in all areas.

Faster Time-to-Market

The ADTRAN 1148VX compact sealed FTTN solution allows service providers to realize 100 Mbps speeds with their existing copper infrastructure, economically delivering ultra broadband services to the home using vectored VDSL2.

ADTRAN designed the standalone, weatherproof 1100 Series FTTN systems to be mounted on a pole, pedestal, cross-box, remote terminal or other challenging locations, eliminating the need for expensive cabinet enclosures, heat exchangers and site construction, which account for a large portion of the total cost of deployment. This allows for ultra broadband services deployment within days, instead of months, dramatically lowering deployment costs.

Cost-Effectively Expand Broadband Footprint

Integrated 10 Gigabit Ethernet switching in the 1148VX Host units allows connecting up to four 1148VX nodes to create an FTTN system that scales to 192 ports in a single managed node. With an external VRM, up to eight 1148VX nodes (384-subscribers) can be supported in a single managed node, accommodating long-term growth and lowering initial circuit costs. This eliminates the need for complex binder management required by less capable 48-port only board-level vectoring solutions. Ethernet Ring Protection Switching (ERPS) support enables resilient connection of multiple nodes while minimizing aggregation port cost.

The 1148VX is a future-proof solution with four 1/10GigE or GPON/10G PON ports. As demand grows, the system can be upgraded to 10G uplinks to deliver higher broadband speeds and enhance customer satisfaction.


Integrated primary protection eliminates the need for extra equipment and provides the absolute smallest footprint for the 1148VX vectored VDSL2 system.

1148VX

Lower Operation and Maintenance Costs

Developed with concern for carrier-field needs, the 1148VX comes with customer-accessible cables that allow for quick replacement of units in the field. Several cable lengths with MS2 or 710 type connectors or unterminated stub are available to accommodate the needs of all service providers. The 1148VX can be remotely provisioned and managed using TL1, Telnet, or SNMP, as well as ADTRAN's next-generation open, SDN-ready Mosaic Cloud Platform providing service providers a path to a Software Defined Access (SD-Access) Network.

RFT-V span, 100-240 VAC, and -48 VDC local powering options are offered within the unit, eliminating the need to order and spare different part numbers for different applications. Span powering from the central office allows for the centralization of battery backup and greatly reduces deployment costs. The 1148VX uses 1 to 8 powering pairs from the central office with the actual pair count dependent on the desired deployment range.

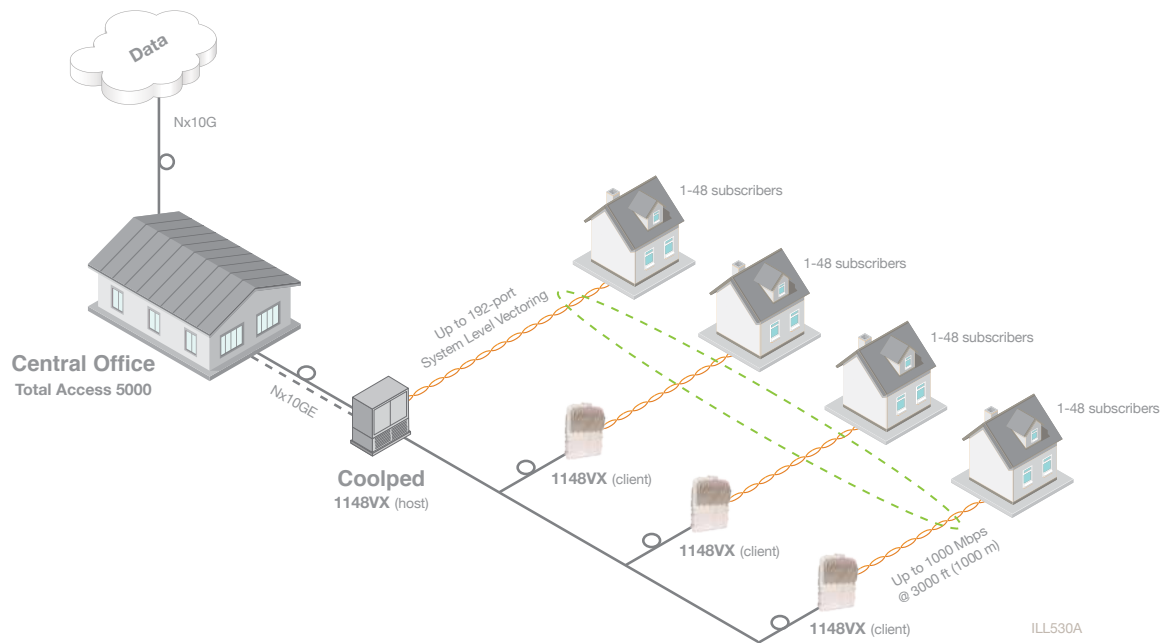

Product Specifications

Mechanical

- **Dimensions:** 56.9 cm x 42.1 cm x 15.6 cm (22.4 in. x 6.57 in. x 6.4 in) (H x W x D)
- **Weight:** 19 kg (42 lbs)
- **Outdoor Mounting:** Pole, Pedestal, Cross-box, Remote Terminal, other challenging locations

Interfaces

Access

- 48 subscriber ports of vectored VDSL2 for high speed Internet
- Well-suited for 100Mbps services delivery

Network

- 4 x 1/2.5/10GE or GPON/10G PON SFP interfaces
- Resilient Ethernet Ring per ITU-T G.8032 (ERPS)

DSL Loop Interface

- Modulation Type: Discrete Multi-Tone (DMT)
- Mode: Full Duplex, Non-overlapped
- Standards: T1.413; G.992.1 Annex A; G.992.2 Annex A; G.992.3; G.992.4; G.992.5
- Number of Pairs (DSL): 48 (one per loop)
- Downstream Data Rate:
 - ADSL2: Up to 96 Mbps
 - ADSL2+: Up to 192 Mbps
 - VDSL: Up to 600 Mbps
- Upstream Data Rate:
 - ADSL: Annex A mode – up to 9 Mbps
 - ADSL2+: Annex M mode – up to 18 Mbps
 - VDSL: Up to 300 Mbps
- DSL Service Range: 18,000 feet (5.5 km)

DSL Standards

- ITU G.993.2 (VDSL2)
- ITU G.992.3 (ADSL2)
- ITU G.992.5 (ADSL2+)
- ITU G.993.5 (G.vector)
- G.998.1 (ATM Bonding)
- G.998.2 (EFM Bonding)

VDSL2 Profiles and PSDs

- Profiles 8a-d, 12a-b, 17a
- Annex A and Annex B PSDs

IPTV Support

- Internet Group Management Protocol (IGMP) v2 and v3
- Dynamic Host Configuration Protocol (DHCP) support with option 82

Ethernet Services Support

- Single Stack VLAN and Double Stack VLANs
- (Q-in-Q) Manipulation
- Flexible Traffic Classification
- Ingress Policing and Egress Shaping
- IGMP Snooping and Proxying

Security

- Management AAA via RADIUS and TACACS+
- SSHv1/v2, SFTP, and HTTPS

Management

- Local: Local Craft Interface (DB9, RS-232)
- Remote: TL1, Telnet, SNMP, Mosaic Cloud Platform, Advanced Operational Environment (AOE) Management Suite

Environmental

- **Operating Temperature:** –40° C to +65° C (–40° F to 149° F)
- **Storage Temperature:** –40° C to +85° C (–40° F to 285° F)
- **Relative Humidity:** 95%, Non-Condensing
- **Environmentally Hardened:** Fully Sealed, Watertight

Power

- Local DC Power: –48 VDC
- Local AC Power: 100-240 VAC, 50/60 Hz, Auto-ranging AC Power Supply
- Line Power: 1 to 8 Line-Powering Pairs

Regulatory Standards

- GR-487-CORE, Issue 4
- NEBS Level 3
- GR-1089-CORE, Issue 6
- GR-63-CORE, Issue 4
- UL 60950-1/22
- RoHS Compliant
- FCC Part 15

Ordering Information

Equipment Options		Part No.	
1148VX HOST, ANSI		1179932F1	
1148VX Client, ANSI		1179930F1	
1148VX HOST, CALA		1179933F1	
1148VX Client, CALA		1179931F1	
OSP System-Level Vectoring Resource Module (VRM)		1179937F1	
1148VX 384-Port VRM		1179938F1	
OSP SLV Adapter Module		1179939F1	
OSP SLV Cable		1179851G1	
1148V Host to Client Expansion Cable		1179830G1	
Accessories			
1148VX (4th Gen) Pole Mount Bracket		1179779G1	
1148VX (4th Gen) Wall Mount Bracket		1179779G2	
1148VX (4th Gen) Cooled Mount Bracket		1179779G4	
24PR Sealed Power Node		1179880G1	
Cable** Options			
Power			
11xx DC Power Cable (20 feet)		1179810G2	
11xx AC Power Cable (20 feet)		1179810G7	
Span Power (MS2 Connectors) (20 feet)		1179814G2	
Span Power (710 Connectors) (20 feet)		1179814G4	
Span Power (MS2, CAT5 Power/DMT) (5 feet)		1179817F2	
Span Power (710, CAT5 Power/DMT) (5 feet)		1179817F1	
Alarm Input Cable (10 feet)		1179810G5	
POTS, POTS/DSL, Fiber	5 ft.	15 ft.	20 ft.
Cable Kit, 1148V, CAT5 AMP (MS2)	1179815F2		1179815F4
Cable Kit, 1148V, CAT5 AMP (710)	1179815G1		1179815F3
Cable Kit, 1148V CAT5 STUB		117815F7	1179815F8
100-Pair 24 AWG (MS2)	1179816F1		1179816F2
100-Pair 24 AWG (710)	1179816F4		1179816F5
Cable Kit, 1148V, 24AWG STUB		1179816F7	1179816F8

**Additional cable lengths available for quote. Please email support@adtran.com or call 888-4ADTRAN for pre-sales support.



ADTRAN, Inc.
901 Explorer Boulevard
Huntsville, AL 35806

General Information
+1 256 963 8000
www.adtran.com/contactus

**Headquarters—EMEA
ADTRAN GmbH**
Erika-Mann-Str. 25
80636 Munich-Germany
+49 89 411097 111
sales.europe@adtran.com

Central-/East and West Europe
+49 89 411097 111
sales.cewe@adtran.com

South Europe
+49 89 411097 111
sales.southeurope@adtran.com

North Europe and CIS
+49 89 411097 111
sales.ne@adtran.com

Middle East and Africa
+49 89 411097 111
sales.mea@adtran.com

Asia
+61 3 9658 0500
sales.asia@adtran.com

Australia/New Zealand
+61 3 9658 0500
sales.australia@adtran.com

I61179932F1-8B

March Copyright © 2017 ADTRAN, Inc. All rights reserved. ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN and Total Access are registered trademarks of ADTRAN, Inc. and its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.

ADTRAN warranty duration and entitlements vary by product and geography. For specific warranty information, visit www.adtran.com/warranty

ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding ADTRAN's export license, please visit www.adtran.com/exportlicense



ISO 9001
ISO 14001
TL 9000